

SUMEC

Phono[®] Solar



AUSTRALIA

390W
BIFACIAL

DIAMOND DUAL GLASS

THE DIFFERENCE IS CLEAR

BUILT TOUGH TO PERFORM IN AUSTRALIA

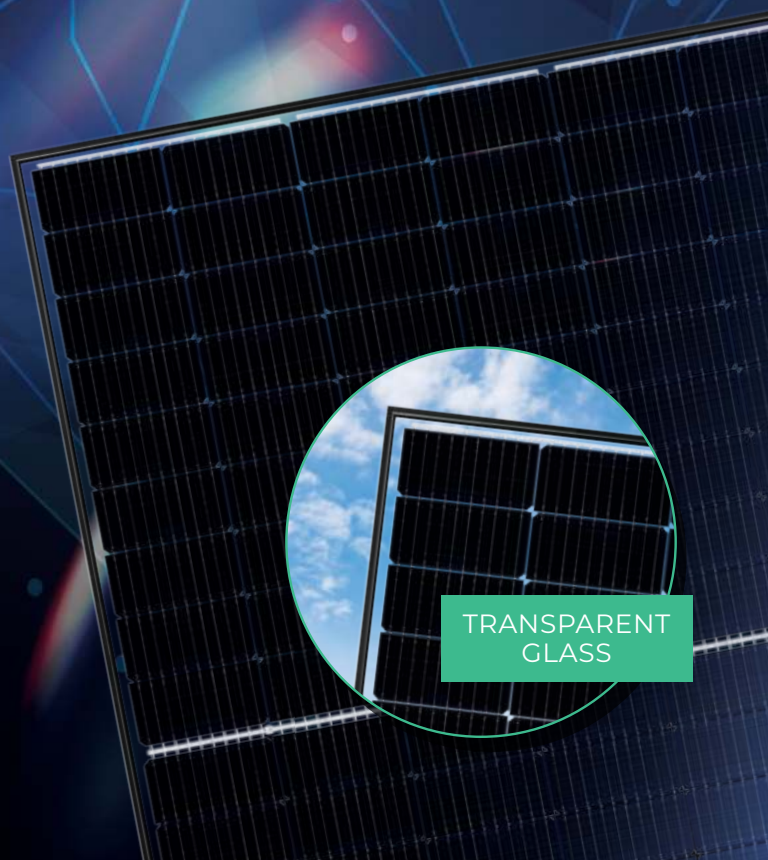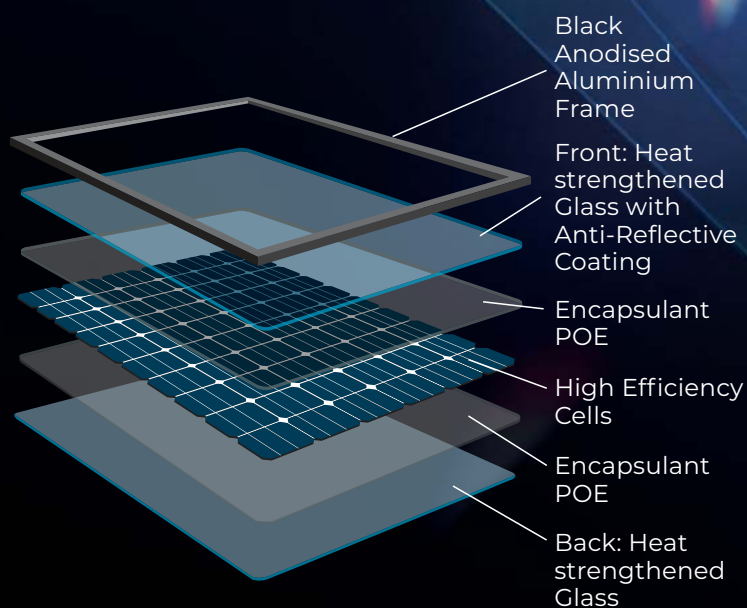

WHY DUAL GLASS MATTERS


LOWER GRADE, PLASTIC BACKSHEETS

Under harsh conditions, the plastic back sheet has been a common failure point of solar panels in Australia.



DIAMOND GLASS

A second layer of tempered glass in replacement of the plastic back sheet allows **Zero Vapour Penetration**. This change and the addition of POE means you can install next to the coastline or in Australia's harshest climates.



20
20 YEAR
PRODUCT
WARRANTY*



30 YEAR
PERFORMANCE
WARRANTY

BLUE
CHIP[™]
Solar Panel



SUMEC

Phono[®] Solar
AUSTRALIA

The Engineers' Choice


THE CLEAR DIFFERENCE

Working within Australia's harsh environment, Sumec Phono Solar manufacture a beautifully tough panel that's **CLEARLY DIFFERENT**.

BIFACIAL TECHNOLOGY


MORE POWER, PER PANEL

The Diamond Dual Glass solar panel can absorb power from both sides of the panel. In optimal install conditions, **up to 25% additional power yield can be gained** thanks to its BiFacial design.

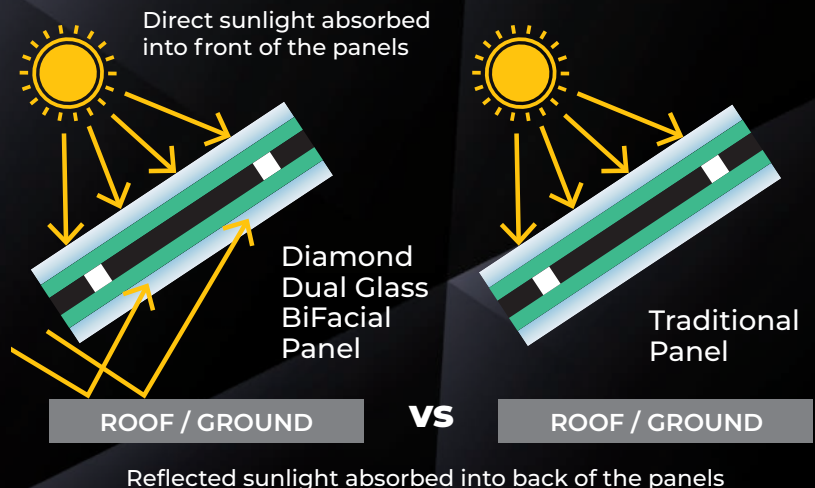

20% MORE WARRANTED POWER

The enhanced build quality of the Diamond Dual Glass Panel gives us the **confidence to warrant its performance for three decades**.

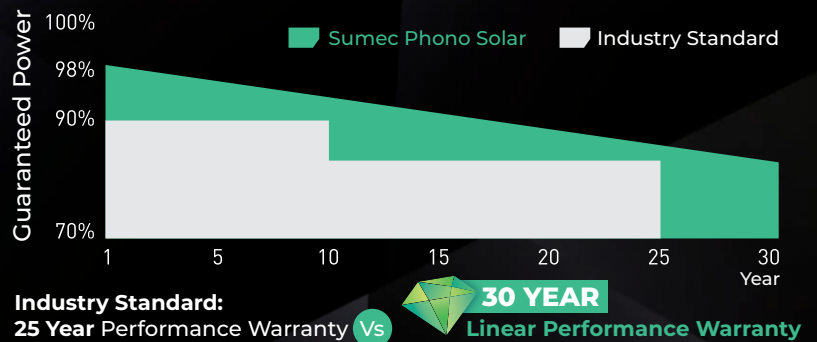

ROBUST DESIGN FOR HARSH AUSTRALIAN CONDITIONS

The Diamond Dual Glass Series is thoroughly tested and built for the extremes. From the high humidity of North Queensland to the Coastal regions where over 80% of Australian's live.



BLOOMBERG
TIER 1 BRAND



OWNED BY
FORTUNE 500
GLOBAL COMPANY



2021 TOP
PERFORMING
PANEL



SALT MIST
CERTIFICATION TO TOP
SEVERITY LEVEL.


MAKE A SECURE INVESTMENT

4 LAYERS OF PROTECTION

In 2013 there were more than 400 Solar Panel Manufacturers approved for install in Australia and today there are fewer than 100.

SUMEC were founded over 40 years ago. We understand a warranty is only as strong as the company behind it.

As a **Blue Chip brand**, Sumec Phono Solar has **longevity, commitment and stability** at every layer of protection. From the Fortune 500 Founding Corporation, through to the experienced Australian Distributor, **you can feel secure in your solar investment** for decades to come.

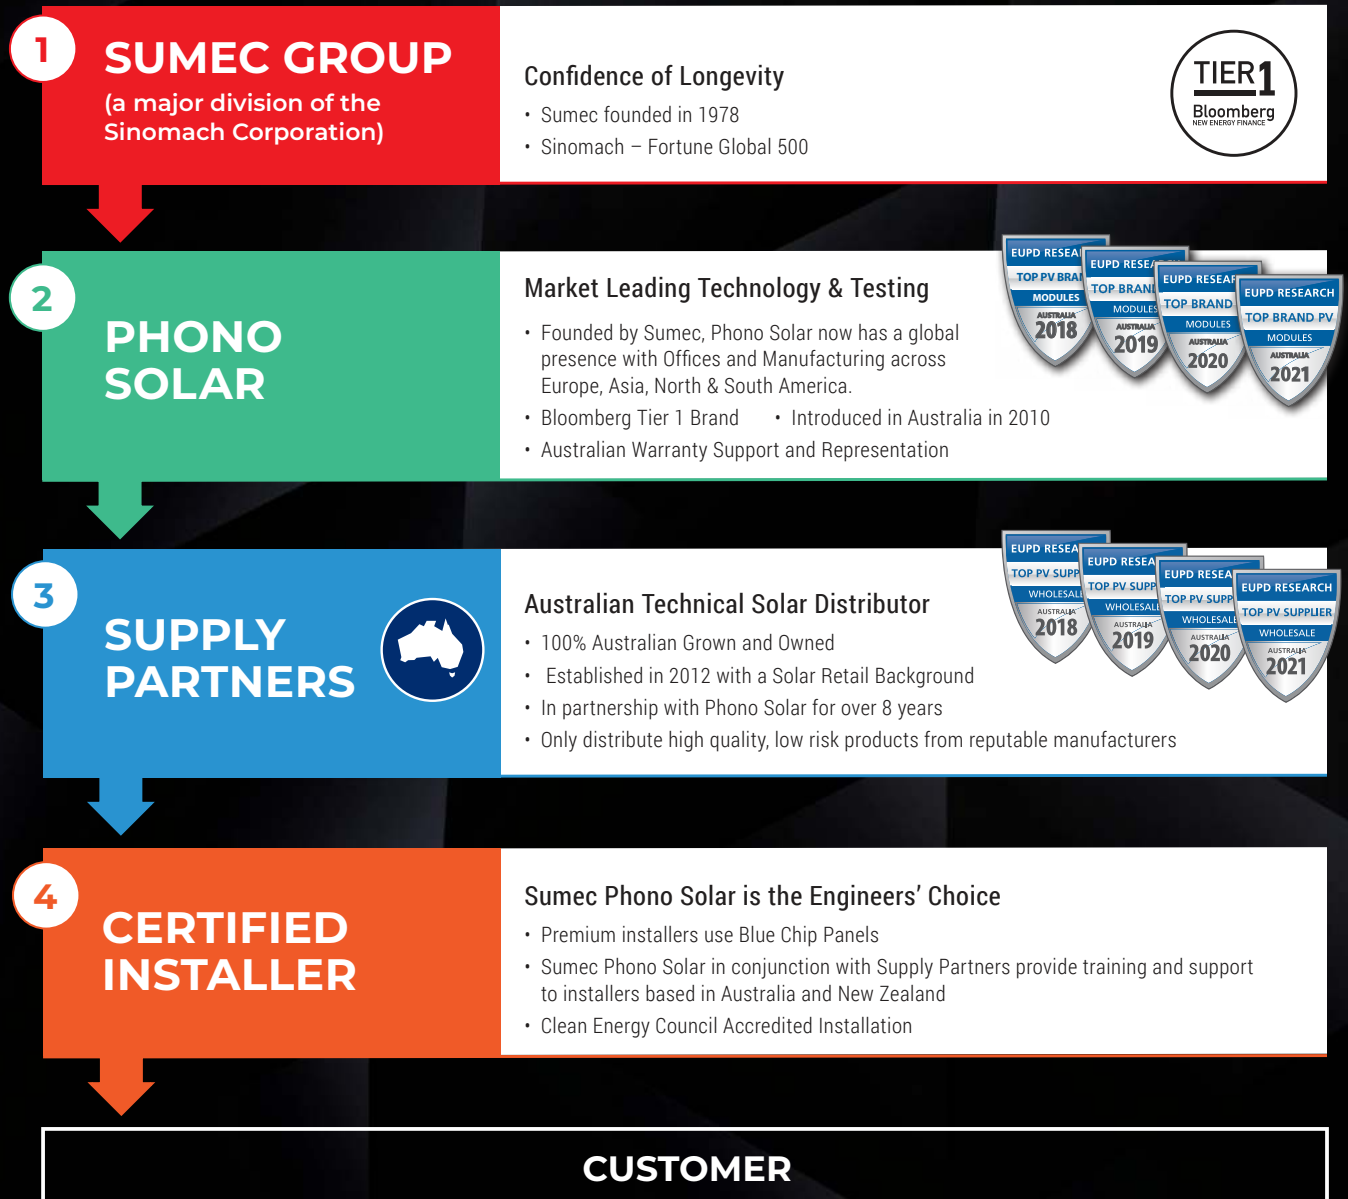

**AUSTRALIAN
OFFICE AND
REPRESENTATION**

SUMEC PHONO SOLAR AUSTRALIA
Level 35, Tower One, 100 Barangaroo Ave, Sydney, AUSTRALIA
TEL: 02 8114 4516 www.phonosolar.com.au

PHONO SOLAR INTERNATIONAL (SUMEC)
No. 1 Xinghuo Rd., Nanjing Hi-tech Zone, Nanjing, CHINA
www.phonosolar.com

DIAMOND DUAL GLASS MODULE

ELECTRICAL TYPICAL VALUES

Model	PS390M7GF-18/VH PS390M7GFH-18/VH	
Testing Condition	STC	NMOT
Rated Power (P _{mp}) ²	390W	287
Rated Current (I _{mp})	12.65	10.12
Rated Voltage (V _{mp})	30.84	28.36
Short Circuit Current (I _{sc})	13.49	10.87
Open Circuit Voltage (V _{oc})	36.87	34.10
Module Efficiency (%)	19.90	

TEMPERATURE CHARACTERISTICS


Voltage Temperature	-0.28%/°C
Coefficient Current Temp	+0.048%/°C
Coefficient Power Temp	-0.35%/°C
Power Tolerance	0~+5w
NOCT	42±2-C:
Bifaciality	70±5%

MECHANICAL CHARACTERISTICS

Cell Type	Monocrystalline 182mm x 91 mm
Dimensions	Length: 1724mm, Width: 1134mm Height: 35mm
Weight	24.7kg
Front/Back Glass	2.0/2.0 Toughened Glass
Frame	Black anodised aluminium alloy
Cable	4mm ² (IEC), 1150mm cable length
Junction Box	IP 68 rated
Connectors	MC4-EVO 2 (1500V)

PACKING CONFIGURATION

Container	Pieces per container	Per Pallet
40'GP	806	31

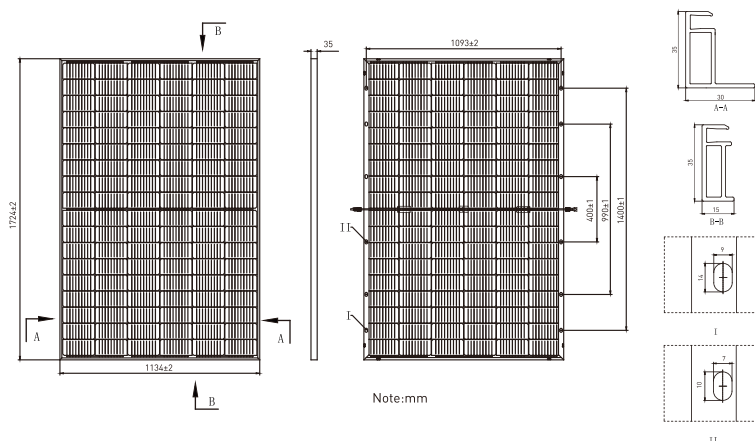

BIFACIAL ELECTRICAL VALUES



5% Gain	Maximum Power 404W	Module Efficiency 20.7%
15% Gain	Maximum Power 431W	Module Efficiency 22.0%
25% Gain	Maximum Power 458W	Module Efficiency 23.4%

Additional power gain will vary according to the ground clearance and surface reflectivity at the installation location. Higher ground clearance and surface albedo will provide better results.

ABSOLUTE MAXIMUM RATING

Operating Temperature	From -40 to +85°C
Hail Diameter@ 80km/h	Up to 25mm
Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Maximum Series Fuse Rating	30A
PV Module Classification	II
Module Rating (IEC 61730)	C
Maximum System Voltage	DC 1000V/1500V

ELECTRICAL CHARACTERISTICS

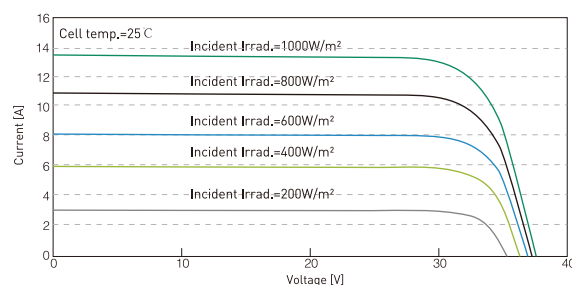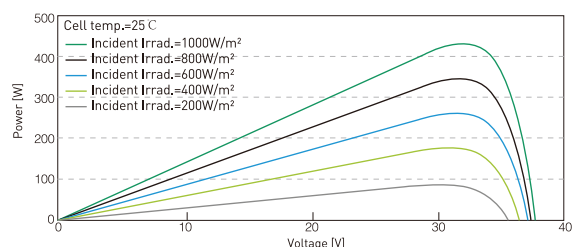

- In compliance with our warranty terms and conditions.
- Measurement conditions under irradiance level of Standard Test Conditions (STC): Irradiance 1000W/m², AM 1.5, Cell Temperature 25°C.

SUMEC
Phono Solar
AUSTRALIA



30-year linear performance warranty to 84.95% at year 30.
This amounts to 2% degradation in the first year, 0.45% annually.

*** 20 year Product Warranty applies to systems installed below 100kW in total size. All systems 100kW+ are eligible for 15 year Product Warranty. Please see our warranty document for full details.**

NOTE: This datasheet is not legally binding. Phono Solar reserves the right to make specifications changes without notice.

Further information can be found on our website: www.phonosolar.com.au